




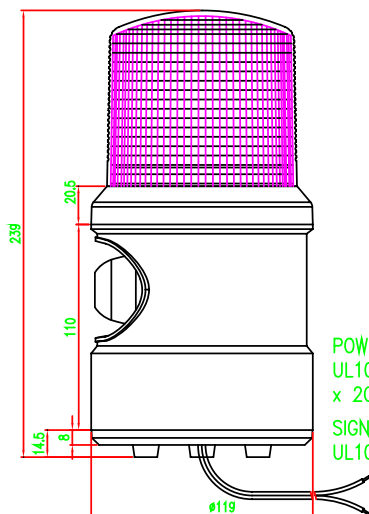

POWER CABLE
UL1015-NO.18 (0.75 sq.)
x 2C 400mm
SIGNAL CABLE
UL1007-NO.22(0.3 sq.) 400mm

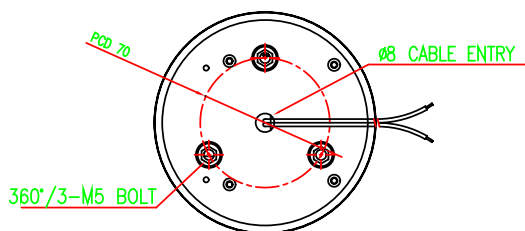

MODEL NO			TL100DL			
MATERIAL			HOUSING-ABS			
			GLOBE-AS			
			REFLECTOR-HEAT RESISTING ABS			
COLOR OF LENS			RED(),AMBER(),GREEN(),BLUE()			
FLASHES PER MIN.			60~80			
USE VOLT.	LED	CURRENT	DC12V	ø5	MAX. 0.331A	
			DC24V		MAX. 0.340A	
			AC110V		MAX. 0.219A	
			AC220V		MAX. 0.113A	
KIND OF SOUND			WS	5 WARNING SOUNDS		
			WM	5 MELODIES		
			WA	5 ALARMS		
			WV	3 VOICE SIGNALS		
SOUND LEVEL			96~110 dB			
PROTECTION GRADE			WATER & DUST PROOF IP54			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			

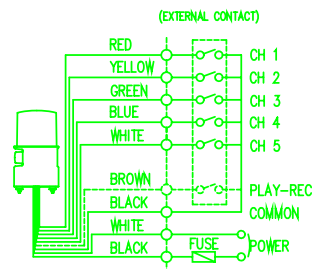

ELECTRICAL CONNECTION DIAGRAM

1	-	-	-	1	-	-
Nr.	TITLE/ NAME	MAT'L	SPEC.	QTY	W/T	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	SCALE
Y.H. JOO				3	101125	N.S
TALENT WWW.TALENTKJ.COM				TITLE OUT-LINE DRAWING TL100DL		
				DWG. Nr.	EDITION	SHEET
				TL100DL-001	1	1/-